
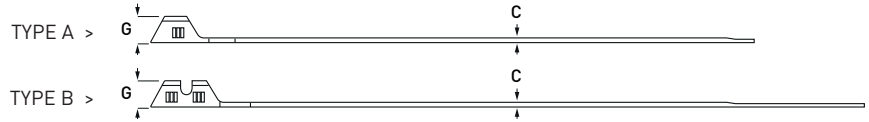


EASY BELTURING

Technical Data Sheet update to 10.05.2017 / pag. 1 of 1



APPLICATION

Working temperature:

-40°C ÷ 95°C

Installation temperature:

-30°C ÷ 60°C

Umidity absorption:

< 1,5% (23°C - 50% R.H.)

Suitable for outdoor application

CABLE TIE IN TECHNO-POLYMER UV AND WEATHER RESISTANT FOR EXTERNAL APPLICATION

TECHNICAL DATA									
CODE	TYPE	NOMINAL DIMENSIONS						BUNDLE DIAMETER	
		mm	mm	mm	mm	mm	mm	mm	mm
Black		A	B	C	E	F	G	Ø min	Ø max
6551E	A	180	8,8	1,7	14,7	25	6,7	10	38
6553E	B	270	8,8	1,8	14,7	34	6,6	25	63
6555E	B	360	8,8	1,8	14,7	34	6,6	25	93

MATERIALS

Material:

techno-polymer black UV stabilized and weather resistant

Material flammability rating:

UL 94-HB

Halogen free

High resistance to UV rays

Excellent resistance to:

aromatic solvents, oils, greases and derivates.

Good resistance to: bases

Limited resistance to: acids

Not resistant to:

phenols and to chlorinated solvents

CODE	Tensile strength**	Insertion effort	PACKAGING	
			Bag	Box
Black	Newton (N)	Newton (N)	pcs	pcs
6551E	390	<10	100	4.000
6553E	560	<10	100	2.500
6555E	560	<10	100	2.000

** Please consider a suitable safety factor equal or above 2

UV RESISTANCE

According to CEI EN 62275 § 6.2.2

- Type 1:retains 50% strength after testing (ISO 4892-2 - method A - 1000 h exposure to xenon-arc radiation)

COLORS

● Black

APPROVALS / CERTIFICATIONS

EC Directives:

Material used to produces listed cable ties comply with EC Directives:

- 2000/53/EC (ELV)
- 2012/19/EC (WEEE)
- 2003/11/EC

Products are tested according to CEI EN 62275 Cable Ties for Electrical Installation