


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:35.000V I:1.0500A P:36.750W PF:1.0000 Freq:0Hz Lamp Flux:4667.57x1 lm		
NAME: LTY400062CT19 1050mA_4000K	TYPE: YALA ONE	WEIGHT:
SPEC.:	DIM.: 620X620x12	SERIAL No.:1
MFR.: TECONEX	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 127.01 lm/W			
MODEL	LTY400062CT19	I _{max} (cd)	2030	S/MH(C0/180)	1.26
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.36
RATED VOLTAGE(V)	35	TOTAL FLUX(lm)	4667.6	η UP,DN(C0-180)	0.0,50.0
NOMINAL FLUX(lm)	4667.57	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.0
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	35	η down(%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

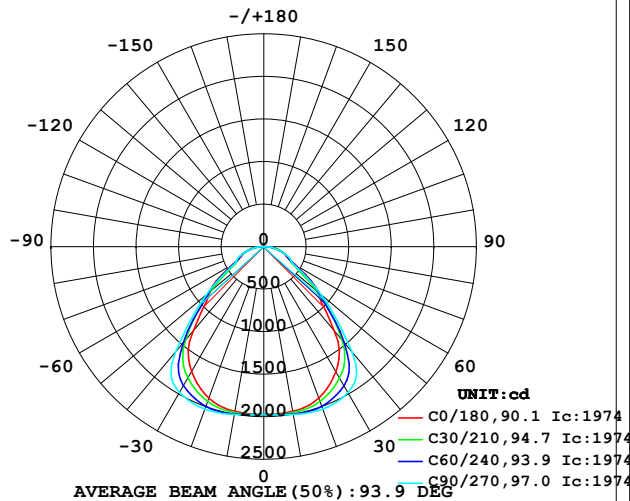

PLANAR ISOLUX DIAGRAM(UNIT:lx)

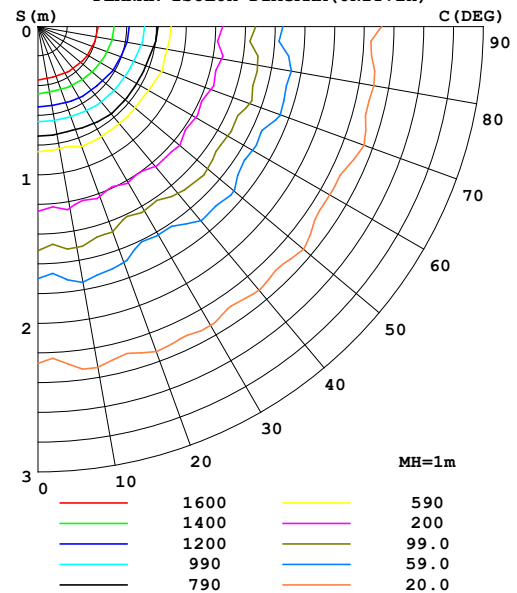

C Range: 0 - 90DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-06-26

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
 Humidity:65.0%
 Test Distance:10.270m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1966	1990	2002	1990	1966	1990	2002	1990	0- 10	189.2	189.2	4.05,4.05
20	1894	1959	2030	1959	1894	1959	2030	1959	10- 20	561.6	750.8	16.1,16.1
30	1697	1807	1981	1807	1697	1807	1981	1807	20- 30	877.8	1629	34.9,34.9
40	1292	1373	1609	1373	1292	1373	1609	1373	30- 40	1036	2664	57.1,57.1
50	825.9	819.4	886.4	819.4	825.9	819.4	886.4	819.4	40- 50	847.2	3512	75.2,75.2
60	425.7	444.5	394.2	444.5	425.7	444.5	394.2	444.5	50- 60	539.8	4051	86.8,86.8
70	267.3	245.2	279.9	245.2	267.3	245.2	279.9	245.2	60- 70	336.3	4388	94,94
80	147.6	134.0	136.2	134.0	147.6	134.0	136.2	134.0	70- 80	208.6	4596	98.5,98.5
90	0	0	0	0	0	0	0	0	80- 90	71.27	4668	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3208.2 lm

%lum = 68.7%

%lamp = 68.7%

Conical surface Flux(120deg): 4051.4 lm

%lum = 86.8%


%lamp = 86.8%

C Range: 0 - 90DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-06-26

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
 Humidity:65.0%
 Test Distance:10.270m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:35.000V I:1.0500A P:36.750W PF:1.0000 Freq:0Hz Lamp Flux:4667.57x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

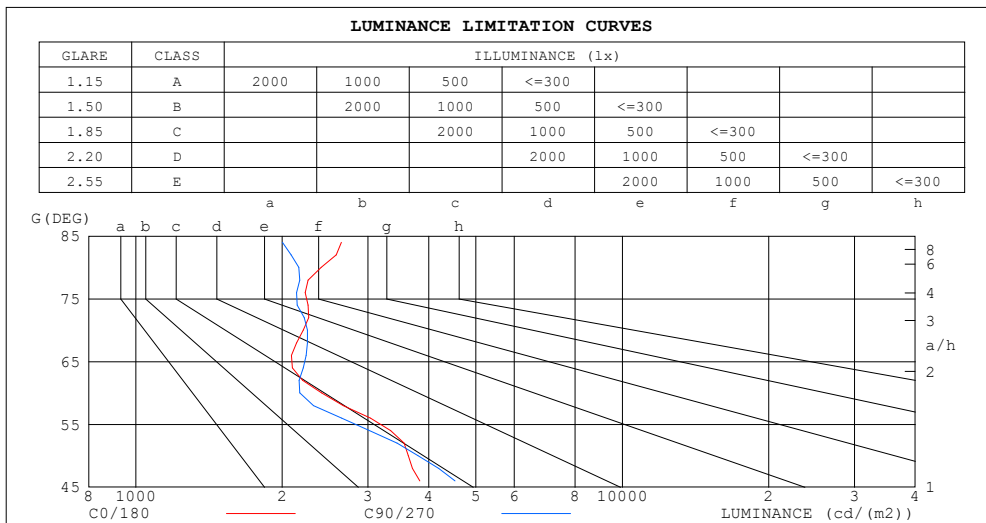

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3171	2403
80	2404	2162
75	2408	2287
70	2210	2255
65	2177	2293
60	2407	2172
55	3423	3098
50	3633	3800
45	4179	5003


C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-06-26

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:10.270m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:35.000V I:1.0500A P:36.750W PF:1.0000 Freq:0Hz Lamp Flux:4667.57x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.99	1.04	1.00	.97	.99	.97	.94	.96	.93	.91	.92	.90	.88	.86
2.0	.94	.88	.83	.92	.87	.82	.89	.84	.80	.85	.82	.78	.83	.79	.76	.74
3.0	.84	.77	.71	.82	.76	.70	.80	.74	.69	.77	.72	.68	.74	.70	.67	.65
4.0	.75	.67	.61	.74	.67	.61	.72	.65	.60	.69	.64	.59	.67	.63	.59	.57
5.0	.68	.60	.54	.67	.59	.54	.65	.58	.53	.63	.57	.52	.61	.56	.52	.50
6.0	.62	.54	.48	.61	.53	.48	.59	.52	.47	.58	.51	.47	.56	.51	.46	.44
7.0	.57	.48	.43	.56	.48	.43	.54	.47	.42	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.38	.51	.44	.38	.50	.43	.38	.49	.42	.38	.48	.42	.38	.36
9.0	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.34	.44	.38	.34	.33
10.0	.44	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.31	.41	.35	.31	.30

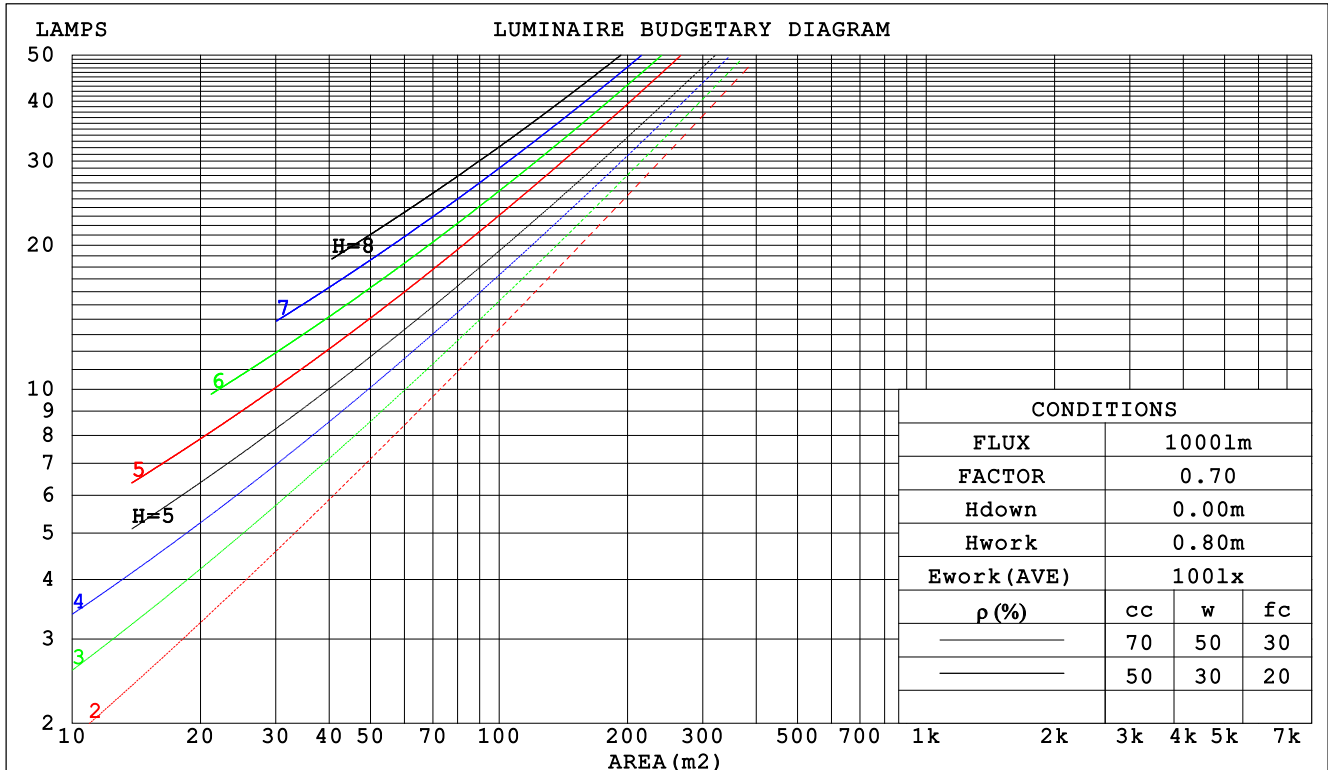

C Range: 0 - 90DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-06-26

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
 Humidity:65.0%
 Test Distance:10.270m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:35.000V I:1.0500A P:36.750W PF:1.0000 Freq:0Hz Lamp Flux:4667.57x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:1	
MFR.: EVERFINE		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0		
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0		
pfc	20%			20%			20%			20%			20%			0		
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)											
0.0																		
1.0	.272	.155	.049	.265	.151	.048	.252	.145	.046	.240	.139	.044	.229	.133	.043			
2.0	.258	.141	.043	.251	.139	.043	.240	.133	.041	.230	.129	.040	.220	.124	.039			
3.0	.241	.128	.038	.235	.126	.038	.225	.122	.037	.216	.118	.036	.208	.115	.036			
4.0	.224	.117	.034	.220	.115	.034	.211	.112	.033	.203	.109	.033	.195	.106	.032			
5.0	.210	.107	.031	.205	.105	.031	.198	.103	.030	.190	.100	.030	.184	.098	.029			
6.0	.196	.098	.028	.192	.097	.028	.186	.095	.028	.179	.093	.027	.173	.091	.027			
7.0	.184	.091	.026	.181	.090	.026	.175	.088	.025	.169	.087	.025	.163	.085	.025			
8.0	.173	.085	.024	.170	.084	.024	.165	.082	.023	.159	.081	.023	.155	.079	.023			
9.0	.163	.079	.022	.161	.078	.022	.156	.077	.022	.151	.076	.022	.147	.074	.022			
10.0	.154	.074	.021	.152	.073	.020	.148	.072	.020	.143	.071	.020	.139	.070	.020			

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.178	.156	.137	.152	.134	.118	.104	.092	.082	.060	.053	.048	.019	.017	.015	
2.0	.168	.132	.102	.144	.114	.088	.098	.079	.062	.057	.046	.036	.018	.015	.012	
3.0	.159	.114	.078	.136	.098	.068	.093	.068	.048	.054	.040	.028	.017	.013	.009	
4.0	.151	.100	.062	.129	.087	.054	.089	.060	.038	.051	.035	.022	.017	.012	.007	
5.0	.143	.090	.050	.123	.078	.044	.085	.054	.031	.049	.032	.018	.016	.010	.006	
6.0	.136	.081	.042	.117	.070	.036	.081	.049	.026	.047	.029	.015	.015	.009	.005	
7.0	.130	.074	.035	.112	.064	.031	.077	.045	.022	.045	.027	.013	.014	.009	.004	
8.0	.124	.068	.030	.107	.059	.026	.074	.042	.019	.043	.025	.011	.014	.008	.004	
9.0	.118	.063	.026	.102	.055	.023	.071	.039	.016	.041	.023	.010	.013	.007	.003	
10.0	.113	.059	.023	.097	.051	.020	.067	.036	.015	.039	.021	.009	.013	.007	.003	

C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-06-26

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:10.270m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:35.000V I:1.0500A P:36.750W PF:1.0000 Freq:0Hz Lamp Flux:4667.57x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:1		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.7	17.1	16.0	17.3	17.5	16.0	17.4	16.3	17.6	17.8
3H	16.7	18.0	17.0	18.2	18.4	16.9	18.1	17.2	18.4	18.6
4H	17.2	18.4	17.5	18.6	18.9	17.3	18.5	17.6	18.7	19.0
6H	17.7	18.8	18.0	19.1	19.4	17.7	18.8	18.0	19.1	19.4
8H	18.0	19.0	18.3	19.3	19.6	17.9	18.9	18.2	19.2	19.5
12H	18.1	19.2	18.5	19.5	19.8	17.9	19.0	18.3	19.3	19.6
4H 2H	16.1	17.3	16.4	17.5	17.8	16.3	17.5	16.6	17.8	18.0
3H	17.3	18.3	17.6	18.6	18.9	17.4	18.4	17.7	18.7	19.0
4H	18.0	18.9	18.3	19.2	19.5	17.9	18.9	18.3	19.2	19.5
6H	18.7	19.5	19.1	19.9	20.2	18.5	19.4	18.9	19.7	20.1
8H	19.0	19.8	19.4	20.2	20.5	18.7	19.5	19.2	19.9	20.3
12H	19.3	20.0	19.7	20.4	20.8	18.9	19.6	19.3	20.0	20.4
8H 4H	18.2	19.0	18.6	19.4	19.8	18.2	19.0	18.6	19.3	19.7
6H	19.2	19.8	19.6	20.2	20.7	18.9	19.6	19.4	20.0	20.4
8H	19.6	20.2	20.1	20.6	21.1	19.3	19.8	19.7	20.3	20.7
12H	20.0	20.5	20.5	20.9	21.4	19.5	20.0	20.0	20.4	20.9
12H 4H	18.2	19.0	18.7	19.3	19.7	18.2	19.0	18.7	19.3	19.7
6H	19.3	19.8	19.7	20.3	20.7	19.0	19.6	19.5	20.0	20.5
8H	19.7	20.2	20.2	20.7	21.2	19.4	19.9	19.9	20.3	20.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.6				
1.5H	+ 0.2 / - 0.4					+ 0.3 / - 0.3				
2.0H	+ 0.7 / - 0.6					+ 1.0 / - 0.8				

CIE Pub.117, 4668 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 5.4$)

C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-06-26

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:10.270m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:35.000V I:1.0500A P:36.750W PF:1.0000 Freq:0Hz Lamp Flux:4667.57x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	65	55	48	64	54	48	63	54	48	42
0.80	75	65	58	74	64	58	72	63	58	51
1.00	82	73	67	81	72	66	79	73	66	60
1.25	89	80	74	88	79	73	85	78	73	66
1.50	93	85	79	92	84	78	89	82	77	71
2.00	99	92	86	97	91	86	94	89	84	77
2.50	102	96	90	100	94	90	97	92	88	80
3.00	105	99	94	103	98	93	99	95	91	83
4.00	108	103	99	106	102	98	102	98	95	87
5.00	110	106	103	108	104	101	104	101	98	89
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-06-26

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:10.270m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:35.000V I:1.0500A P:36.750W PF:1.0000 Freq:0Hz Lamp Flux:4667.57x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

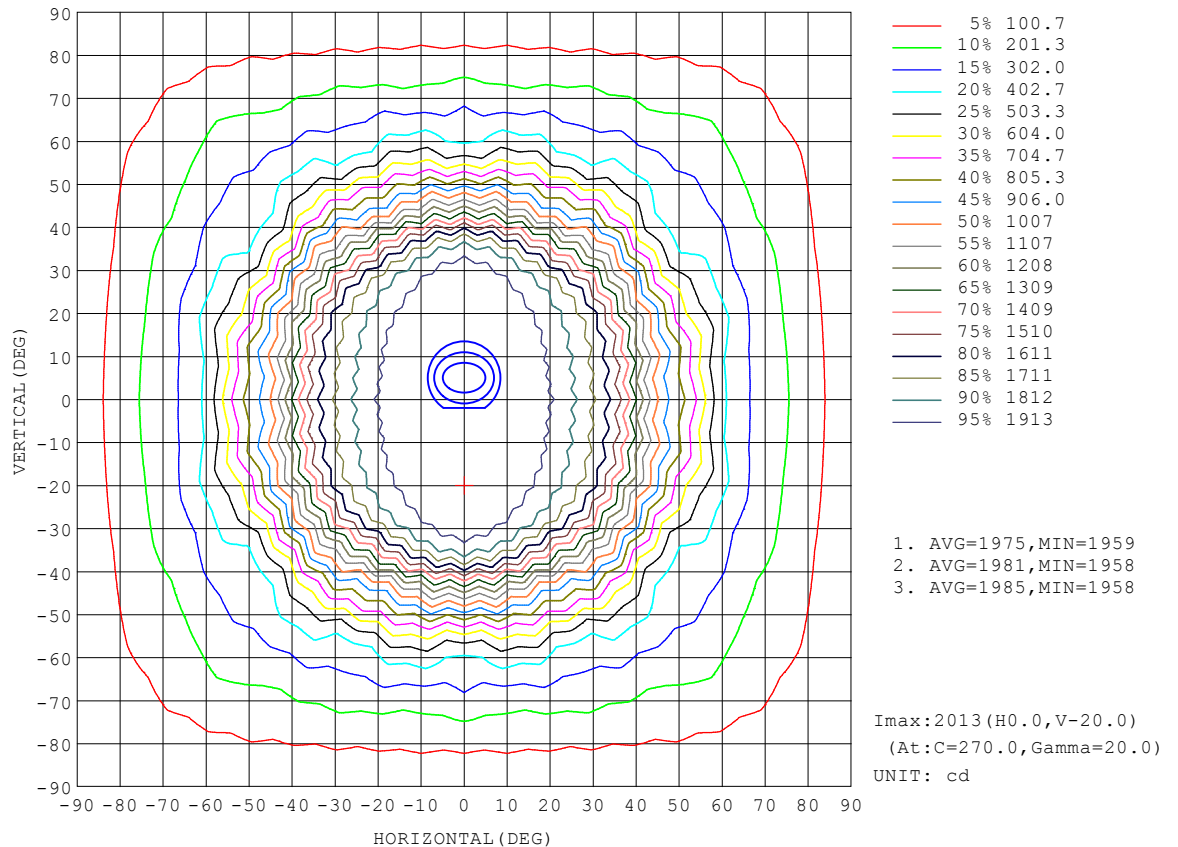


C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-06-26

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:10.270m [K=1.0000]
Remarks:

AAI Figure

Test:U:35.000V I:1.0500A P:36.750W PF:1.0000 Freq:0Hz Lamp Flux:4667.57x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

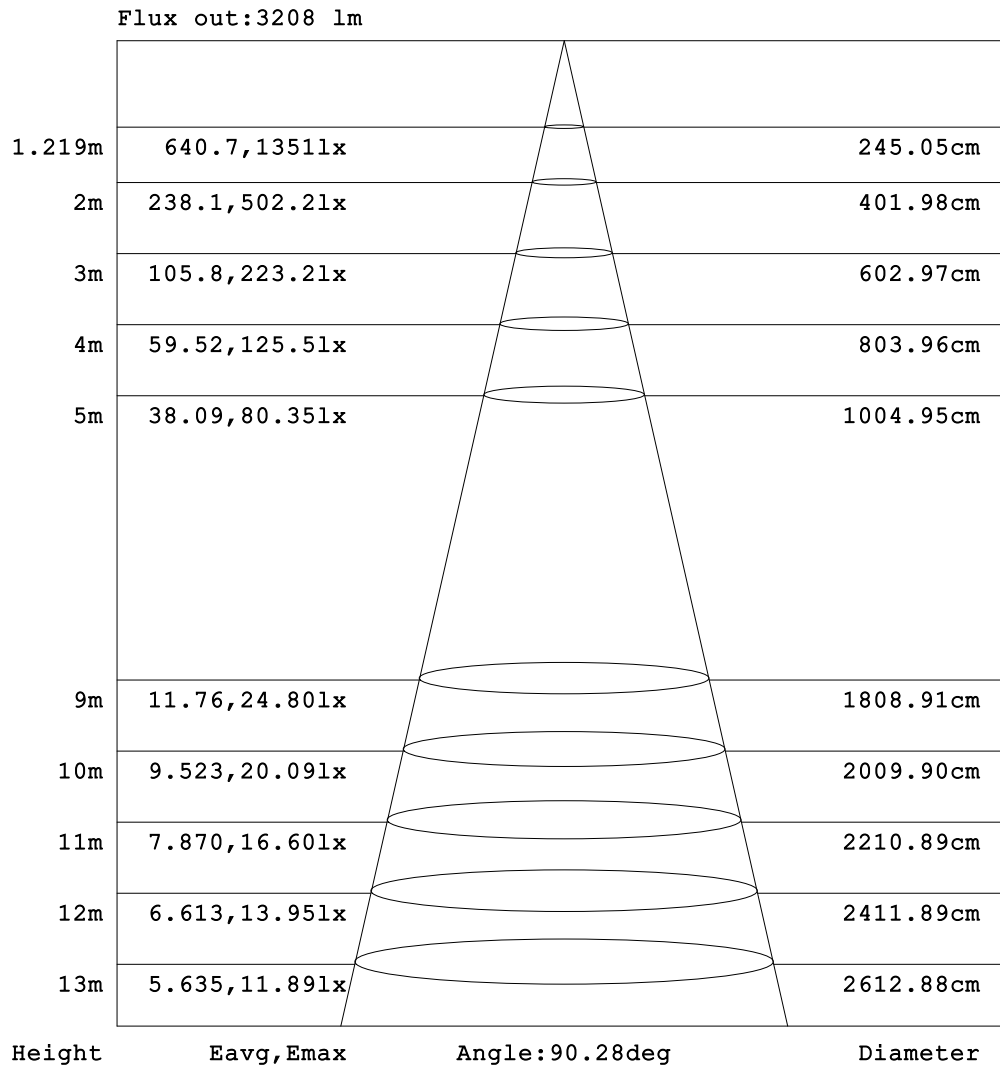


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-06-26

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.295
Humidity: 65.0%
Test Distance: 10.270m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:35.000V I:1.0500A P:36.750W PF:1.0000 Freq:0Hz Lamp Flux:4667.57x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

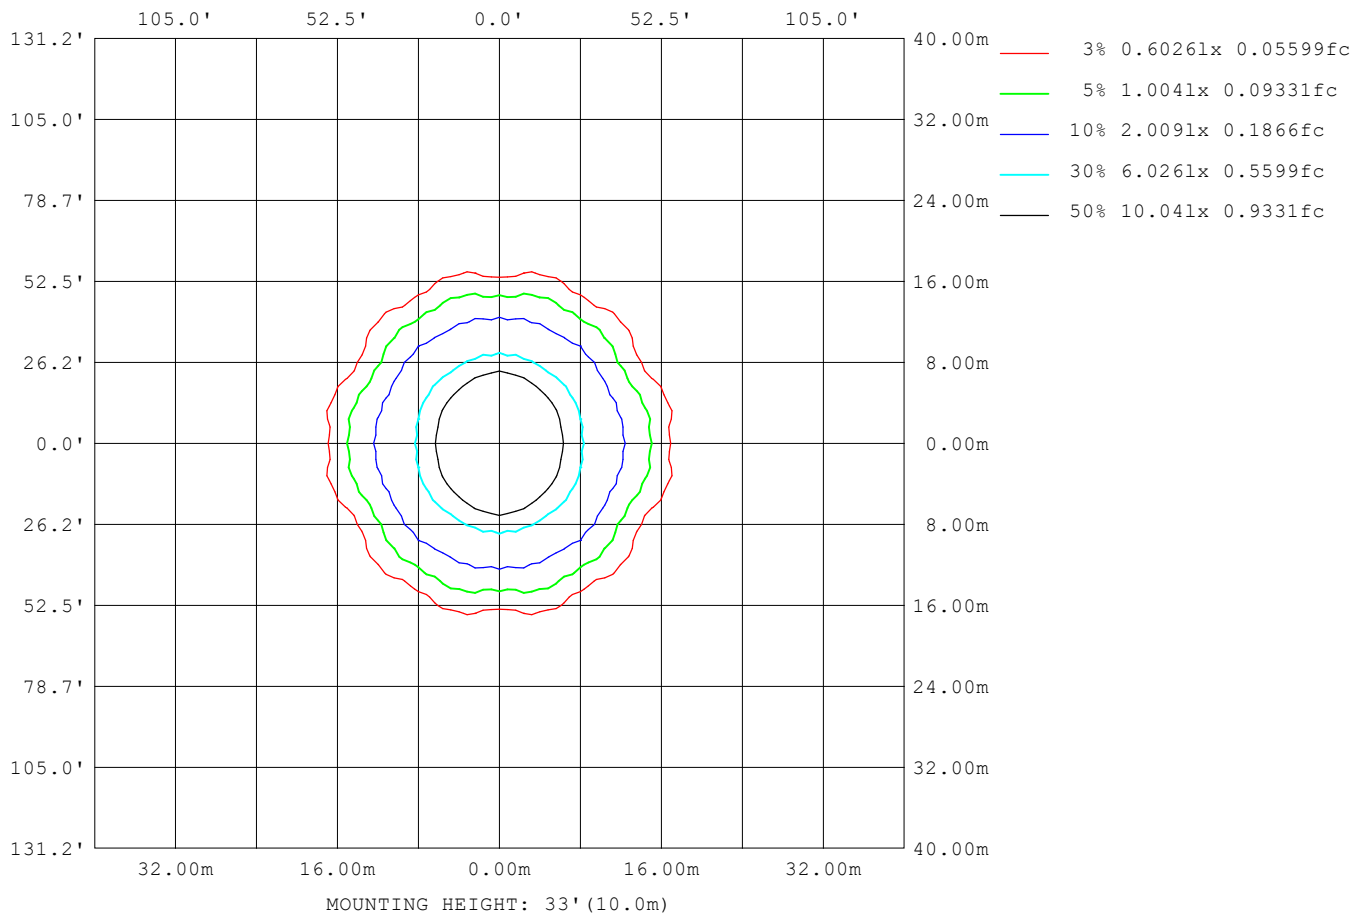

C Range: 0 - 90DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-06-26

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
 Humidity:65.0%
 Test Distance:10.270m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:35.000V I:1.0500A P:36.750W PF:1.0000 Freq:0Hz Lamp Flux:4667.57x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2047
L_0~180 (75) av	2204
L_0~180 (85) av	2619
L_90~270 (65) av	2245
L_90~270 (75) av	2155
L_90~270 (85) av	1923
L_45 (65) av	2245
L_45 (75) av	2037
L_45 (85) av	1854

Standard: GB/T 29293-2012

C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-06-26

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:10.270m [K=1.0000]
Remarks:

Planar Illuminance Curve

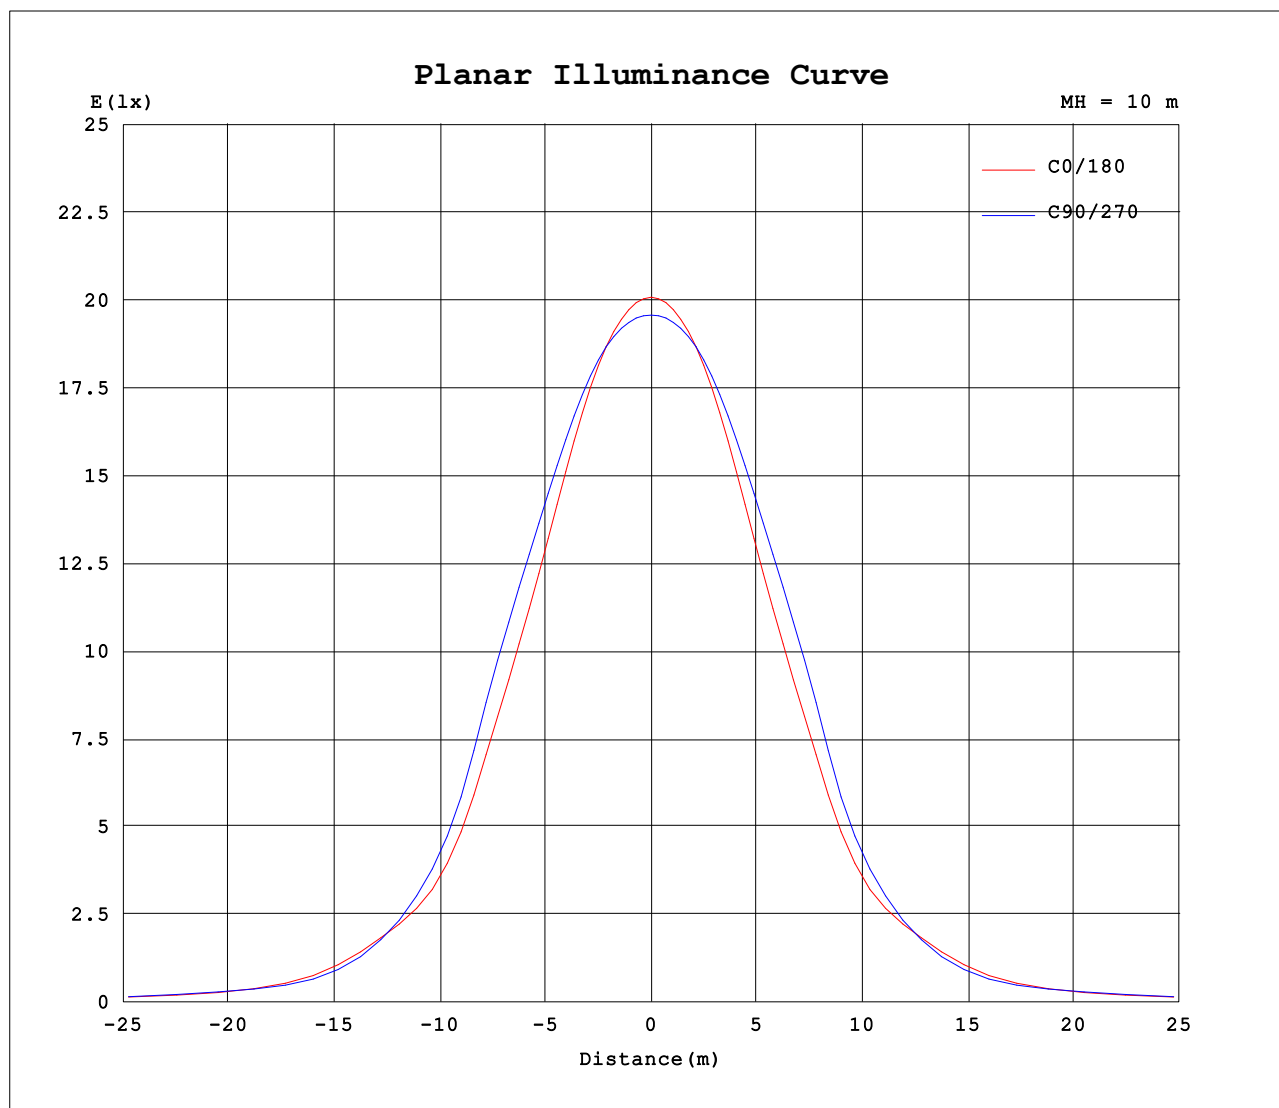

C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-06-26

γ Range: 0 - 90DEG
 γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.295
Humidity: 65.0%
Test Distance: 10.270m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:10.270m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:10.270m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:10.270m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:10.270m [K=1.0000]
Remarks:

```